

单极端子分线盒 S0109/S0206/S0209/S0212

Unipolar terminal junction box
S0109/S0206/S0209/S0212



S0109 一进九出 S0206 两进六出 S0209 两进九出 S0212 两进十二出

● 特点 Features

- 最小尺寸, PA6 材质, 94V0, 铜镀锡;
- 多种型号可选, 方便选型;
- 模块化, 35mm 导轨或螺丝安装, 便捷;
- 多极可选 (单极, 两极, 三级, 四级);
- 大范围的电缆线选择: 输入: 6-35mm²
输出: 2.5-20mm²

Minimum size, PA6 material, 94V0, copper and tin plating;
A variety of models are available for easy selection;
Modular, 35mm guide rail or screw installation, convenient; Optional multipole (unipolar, bipolar, tertiary, quaternary);
Wide range of cable selection: input: 6-35mm²
output: 2.5-20mm²

● 参数规格 Parameter Specification

S0109:

- 输入: 用于单股最大35mm²进线,
- 输出: 最多9只, 2.5-10mm²出线

S0109:

Input: it is used for maximum 35mm² feeding of single strand,
Output: 9 at most, 2.5-10mm² outlet.

S0206:

- 输入: 用于单股最大35mm²进线和出线, 多路串联
- 输出: 最多6只, 6-20mm²出线

S0206:

Input: it is used for single-strand maximum 35mm² incoming and outgoing lines,
and multiple paths are connected in series.
Output: 6 pieces at most, 6-20mm² outgoing line.

S0209:

- 输入: 用于单股最大35mm²进线和出线, 多路串联
- 输出: 最多9只, 4-16mm²输出

S0209:

Input: it is used for single-strand maximum 35mm² incoming and outgoing lines,
and multiple paths are connected in series.
Output: 9 at most, 4-16mm² output

S0212:

- 输入: 用于单股最大35mm²进线和出线, 多路串联
- 输出: 最多12只, 2.5-6mm²输出

S0212:

Input: it is used for single-strand maximum 35mm² incoming and outgoing lines,
and multiple paths are connected in series.
Output: 12 at most, 2.5-6mm² output

● 发货日期 Ship Date

17:00前订购的库存品可以当日发货 <small>Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse</small>	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties

1. 最小起订量1个正常交期7~10天;
 2. 特殊产品交期20天以上;
 3. 非损耗品非人为损坏, 一年包换, 5年包修;
- 1: MOQ 1 PCS delivery date 7-10 days for regular models
2: more than 20 days for customized models
3: Guarantee: one year refundable and 5 year warranty under condition of non-human forces damage


● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	60A/80A/120A/160A
额定电压 Nominal coil voltage	600V


● 选型参考 Reference Selection

型号 Model	输入线径 Input wire diameter	输出线径 Output line diameter	额定电流 Rated Current	额定电压 Rated Voltage
S0109	6-35mm ²	9x2.5-10mm ²	60A	600V
S0206	6-35mm ²	6x6-20mm ²	80A	600V
S0209	6-35mm ²	9x4-16mm ²	120A	600V
S0212	6-35mm ²	12x2.5-6mm ²	160A	600V

外形图 Dimensions

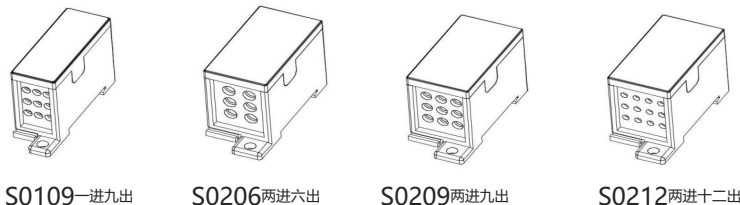

S0109一进九出 S0206两进六出 S0209两进九出 S0212两进十二出

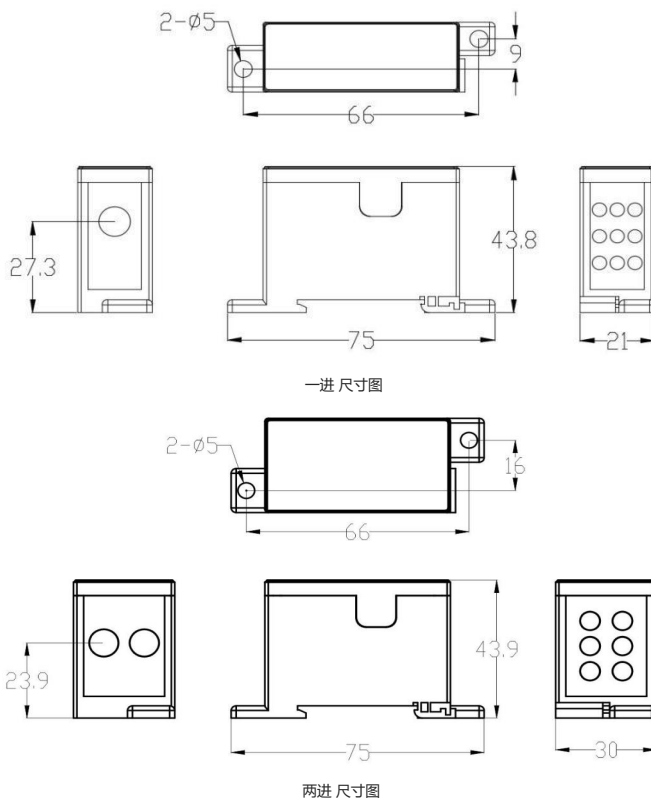

一进尺寸图

两进尺寸图